

SONY[®]

Digital Imager

UP-D72XRS



UP-D72XRS



The Sony UP-D72XRS is a compact, high-speed, high-resolution digital-thermal printing paper imager designed for use with X-ray diagnostic systems, such as mobile c-arm units and dental X-ray systems as well as industrial application.

Supporting 8 x 10 inch Thermal Printing Paper, it offers photo-quality prints with 512-step grayscale. Its use of Sony dry-processing technology means it is also extremely environmentally-friendly.

By using its USB connectivity and compatible printer driver software, it can be used conveniently under the generic Microsoft® Windows® operating system environment. Additionally, the FilmLink feature enables you to utilize the printer for reference image printing by connecting it to the Sony Film Station. This flexible connectivity can provide you with simultaneous reference and diagnostic printing.

With a variety of other convenient features packed into its compact body, the UP-D72XRS is ideal for use in a wide range of medical applications.

FEATURES

sSuperior Image Reproduction

The UP-D72XRS incorporates Sony direct thermal-printing technology, which enables photo-quality prints to be reproduced with a high resolution of approximately 300 dpi. The imager also offers support for 8 x 10 inch Thermal Printing Paper, making it suitable for a variety of applications.

Thermal Printing Paper

The UPP-725 Thermal Printing Paper offers superior quality monochrome image reproduction, for clear viewing of the X-ray image.



sSupports High-speed Data Interfaces

The UP-D72XRS is equipped with a USB connector and a parallel interface* (IEEE 1284), both of which allow data to be transferred to it at high speed from external devices. Additionally, the feature enables Film Link connectivity to your DICOM network.

* Supported in ECP (Extended Capabilities Port),
Compatible-Nibble and Compatible modes.

sHigh-speed Printing

Ideal for time-critical medical applications, the UP-D72XRS offers an impressive printout time of just 40 seconds for an 8 x 10 inch image.

sFront-Loading Operation

The UP-D72XRS has been designed for easy operation and maintenance. All-important controls are on the front panel. An easy to read LCD display is also located on the front panel making the user aware of all printing functions.



Secure Locking System


The newly designed secure paper tray lock system is built for the mobile market in mind. This system ensures that the paper tray will remain locked during movement.

Environmentally Friendly

The UP-D72XRS is based on Sony dry-processing technology, which means the print media use no liquid chemicals or heavy metals such as silver. This frees you from the hassle of disposing of chemical waste.

Compact and Lightweight Design

With dimensions of just 412 x 210 x 431 mm (16 1/4 x 8 3/8 x 17 inches) and a light weight of only 15.5 kg (34 lb 3 oz), and no unnecessary top and side projection ports, the UP-D72XRS can be easily mounted on a mobile c-arm unit.

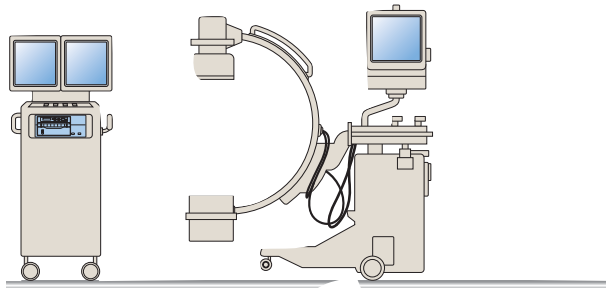

Worldwide Power Supply

The UP-D72XRS is suitable for use all around the world because it can operate with AC 100 V to 120 V and AC 220 V to 240 V power supplies.

Detachable Dust Filter


To prevent the cooling fan from drawing dust into the imager, the UP-D72XRS features a detachable dust filter. This avoids such problems as white spots appearing in image printouts.

Easy Media Availability Checking

The unit is equipped with a small media window on the paper tray, that enables you to check the amount of film or paper still available without actually opening the paper tray.

The UP-D72XRS Application Examples

Printer for C-arm System

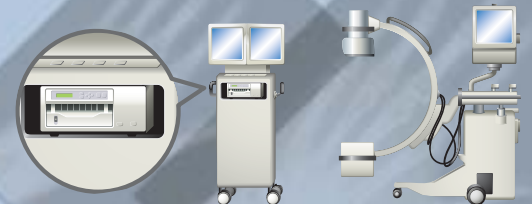


Printer for electron microscope



Printer for Network Viewer



Connection to DICOM Network

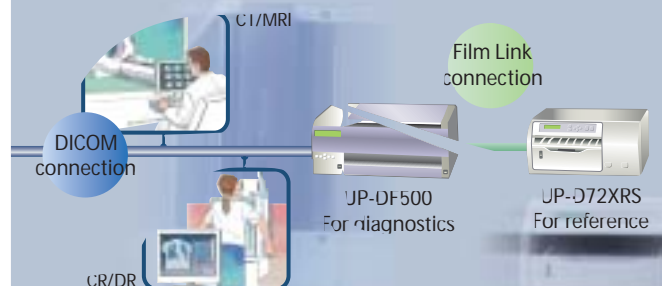

SPECIFICATIONS

UP-D72XRS	
Printing Method	Direct Thermal Printing
Resolution	300 dpi
Gradation	512 gray levels
Effective Print Pixels	2743 x 2320 dots
Print Area	232.2 x 196.4 mm (9 1/4 x 7 3/4 inches)
Printing Time	Approx. 40 seconds
Memory	16 MB
Interface	Parallel IEEE1284 ECP Mode x 1, USB connector* x 1
Paper Tray Capacity	100 sheets (max)
Power Consumption	Standby: 12.6 W (actual measurement) Black printing: 190 W (actual measurement) Max: 270W
Power Requirements	AC 100 to 120 V, AC 220 to 240 V 50/60 Hz
Dimensions (W x H x D)	412 x 210 x 431 mm (16 1/4 x 8 3/8 x 17 inches)
Mass:	Approx. 15.5 kg (34 lb 3 oz)
Operating Temperature	10 °C to 30 °C (50 °F to 86 °F)
Operating Humidity	20% to 80% (no condensation allowed)
Storage and Transport Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage and Transport Humidity	20% to 90% (no condensation allowed)
Safety Standards	UL60950-1, CSA C22.2No.60950.1 UL60601-1, CSA C22.2No.60601.1, EN60950-1, EN60601-1, EN60601-1-2 EN60950-1/IEC60950-1, EN55022, EN55024, EN61000-3-2, EN61000-3-3, AS3548, GB4943 (IEC60950), GB9254 (CISPR22), GB17625.1 (IEC61000-3-2)
Supplied Accessories	Thermal Printing Paper UPP-725 (1), Paper tray (1), Thermal Head Cleaning Kit (1), Cleaning Sheets (2), Tray guide cover (1), AC power cord** (1), Connection cable (1), Floppy disk (1), Sheet of "Before using this printer" (1), CD-ROM (operation manual) (1),

* This connector is shared with Film Link connection.

When you use this connector as Film Link, service modification is required. For more details, please contact your nearest Sony office.

** When you use the printer in Europe, use the AC power cord supplied.

Customers in other countries should use an appropriate AC power cord for your local power system.

Printing Paper



UPP-725

Thermal Printing Paper

Contents: 100 sheets of print paper



Rear Panel

Distributed by

©2005 Sony Corporation. All rights reserved.

Reproduction in whole or in part without written permission is prohibited.

Features and specifications are subject to change without notice.

All non-metric weights and measures are approximate.

Sony is a registered trademark of Sony Corporation.